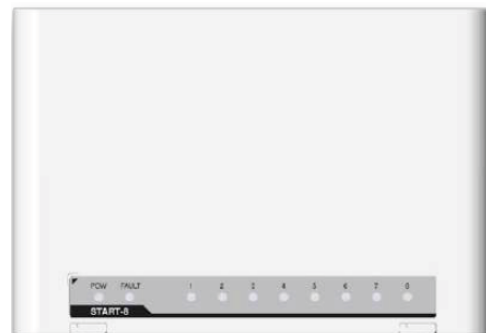


Start-8**Fire Suppression Output Module**

Fire suppression output module Start-8 is designed to expand outputs of Fire suppression panel WL8-FS.

Up to 8 output modules Start-8 can be connected to a single panel.

**Features and benefits**

- 8 discharge circuits
- 4 relay switchers
- Agent discharge control, AFP equipment fault control
- 2 manual launch inputs
- 5 years product warranty

Technical specifications

Power supply range	9 - 28 VDC
Maximum current consumption	65 mA
Extinguishant release outputs	8
Dimensions	210 mm x 142 mm x 38 mm
Weight	0,5 kg
IP rating	IP41
Max tolerated humidity (no condensing)	93% RH
Operating temperature range	From -30 °C to +55 °C

Warranty

All devices are supplied with the benefit of a limited 5 years warranty. This warranty (the warranty period does not apply to battery) is invalidated by mechanical or electrical damage caused in the field by incorrect handling or usage. Product must be returned via your authorized supplier for repair or replacement together with full information on any problem identified.

www.argusspectrum.com