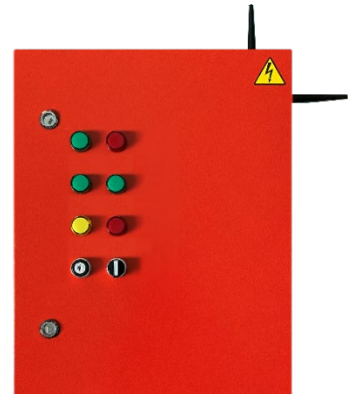


ARG-WL8-SVP**Wireless standpipe valve panel**

The wireless standpipe valve panel ARG-WL8-SVP compatible with ARG-series control panels.

ARG-WL8-SVP provides operation in automatic, manual and “Fault” modes, integrity control of control circuits of executive devices, protection against overloads and short-circuit currents, display of automation status on built-in light indicators.

Using well-proven wireless technology and an orthogonal antenna design ensures the highest levels of life safety and system reliability.

**Features and benefits**

- Bi-directional wireless communication
- Automatic, manual, and fault mode
- Two modifications for single-phase or three-phase motors
- Built-in expander
- 5 years product warranty

Technical specifications

Power supply range	220 VAC or 380 VAC
Communication range with the translator or expander (open space)	2000 m
Communication range with the wireless field devices (open space)	1200 m
Operating frequency	868 MHz
Modulation type	FSK
Operating frequency channels	6
IP rating	IP54
Max tolerated humidity (no condensing)	93% RH
Operating temperature range	From -10 °C to +50 °C

Warranty

All devices are supplied with the benefit of a limited 5 years warranty. This warranty (the warranty period does not apply to battery) is invalidated by mechanical or electrical damage caused in the field by incorrect handling or usage. Product must be returned via your authorized supplier for repair or replacement together with full information on any problem identified.