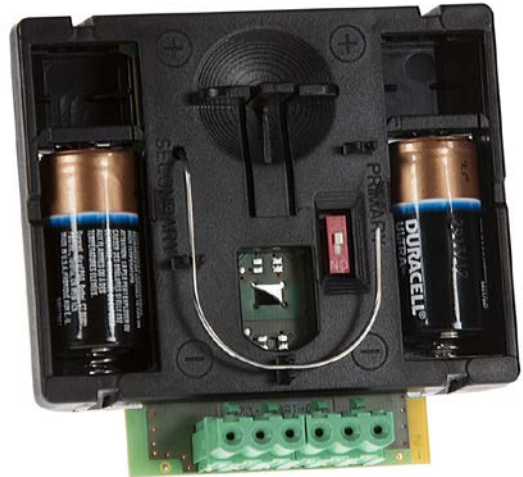


**ARG-WL8-SM**

wireless sounder module

The wireless sounder interface module permits to use the Symphoni, Symphoni LX Wall WP, Symphoni LX Wall (Mfg. Fulleon) conventional sounders in the Streletz-PRO wireless system. When either the conventional sounder or sounder beacon are fitted with this module they become fully compatible with all Argus-Spectrum wireless translators and expander modules. When configured onto a compatible translator, the wireless sounder or sounder beacon are fully addressable and benefit from an extensive range of intelligent control, test and monitoring functionality. The well proven adaptive radio signal processing algorithms ensure the highest levels of life safety and reliability.


**Features and benefits**

- Bi-directional wireless communication
- Synchronization with other modules
- 10 years battery life
- Self-optimizing wireless frequency and amplitude algorithms
- 5 years product warranty

**Technical specifications**

Communication range with the wireless field devices (open space)	1200 m
Operating frequency	868 MHz
Modulation type	FSK
Operating frequency channels	6
Current limit 24V output	40 mA
Battery life:	
Primary battery (type CR123A)	8-10 years
Secondary battery (type CR123A)	6-12 months
Dimensions	81 mm x 77 mm x 24 mm
Weight	100 g
IP rating	IP41
Max tolerated humidity (no condensing)	95% RH
Operating temperature range	From -30 °C to +55 °C

**Warranty**

All devices are supplied with the benefit of a limited 5 years warranty. This warranty is invalidated by mechanical or electrical damage caused in the field by incorrect handling or usage. Product must be returned via your authorized supplier for repair or replacement together with full information on any problem identified.